



BRIC 3000
BRIC 3000 P
BRIC 3600
BMIC 3000

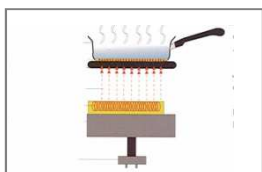

INDUCTION ADVANTAGES

More economical, more powerful, more comfortable, more precise, safer, faster, easier to clean.

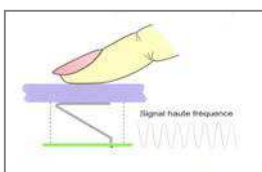

TOUCH PAD

The electronic pad detects the user's finger. It's completely water proof.



VITROCERAM GLASS

The glass is designed to resist to high temperature (thickness : 4 mm).



POWER AVAILABLE

From 50 W (power setting 1) to 3000 / 3600 W.

Power setting 1 to 25 or 35 for Pastry model (for perfect control of cooking). Keep warm function on BMIC



INSTALLATION

The hob is delivered « ready for use ». The unit should not be installed above means heat (such as hotcupboard, oven, ...).



• **Pressed stainless steel (type 304L) outer casing incorporating vitroceramic top,**

• **Generator coil** : 280mm diameter with

• **Timer** : Integrated 99 minute timer with audio and visual alarm and power shut down mode.

• **Controls** : Glass touch control panel having coil selector control, manual power setting (+/-) with display, preset power setting and timer control with display.

• **Power supply** : 230V +/-10% (1ph) AC 50 +/-2%-60Hz +/-2%. 1500 mm power cord included.

• **Washable filter** included.

• **Net weight** (in cartonbox): 9.7 kg. Product weight: 8.5 kg.

• **Standards** : Complies with EN 60335-2-36 (European standard for safety of electrical appliances)+ A1, EN55011 et EN 55014-2 (CEM),

• **Pan usage** : Induction will work with pans having a ferritic base such as enamelled and specific induction pans

POWER SETTINGS:

Power settings: 1 to 25 (1to 35 for Pastry model).

Keep warm function : operating at 60° C with stop-start button and timer adjustment.


Consumption in stand-by state ~ 1 watt.

TECHNICAL SPECIFICATIONS

	Power	Amp Load
BRIC 3000	3000W	12 A
BRIC 3000 P	3000W	12 A
BMIC 3000	3000W	12 A
BRIC 3600	3600W	16 A

The product includes as a standard a brochure, a 1500 mm power cord and a washable filter

Product dimension (mm): width 392 x depth 526 x height 90

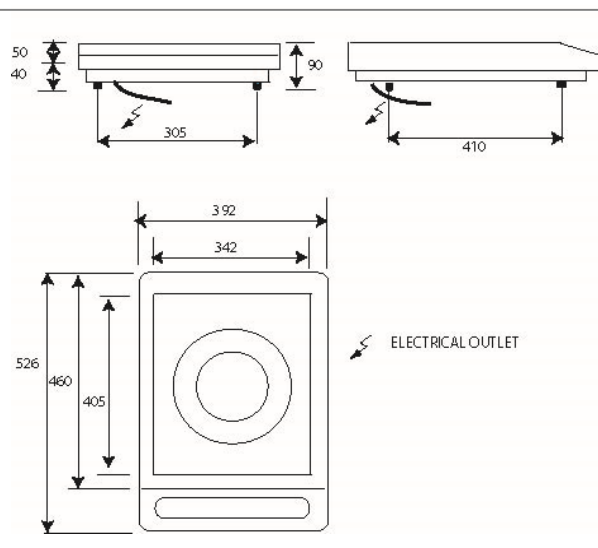

	BRIC 3000 Pastry	BRIC 3000 / BMIC 3000	BRIC 3600
Power setting	Watts	Watts	Watts
1	25	50	50
2	50	100	100
3	75	150	150
4	100	200	200
5	150	250	250
6	200	300	300
7	250	350	350
8	300	400	400
9	350	500	500
10	400	600	600
11	450	700	700
12	500	800	800
13	600	900	900
14	700	1000	1000
15	800	1100	1200
16	900	1200	1400
17	1000	1300	1600
18	1100	1400	1800
19	1200	1600	2000
20	1300	1800	2200
21	1400	2000	2400
22	1500	2200	2600
23	1600	2400	2900
24	1700	2700	3200
25	1800	3000	3600
26	1900		
27	2000		
28	2100		
29	2200		
30	2300		
31	2400		
32	2500		
33	2600		
34	2800		
35	3000		



ADVENTYS PRO

38 rue du 8 Mai 1945 - F-21250 SEURRE - France

Tel : 33 (0) 3 80 204 615 - Fax : 33 (0) 3 80 204 219 - Site Web : www.adventys.com - mail : adventys@adventys.com
S.A.S. au Capital de 214 000 € - Code APE : 2751Z - RCS Dijon 513 510 412 - TVA FR 43513510412